
One declaration, two execution paths

Source reuse reaches the old host only through an explicit semantic adapter.

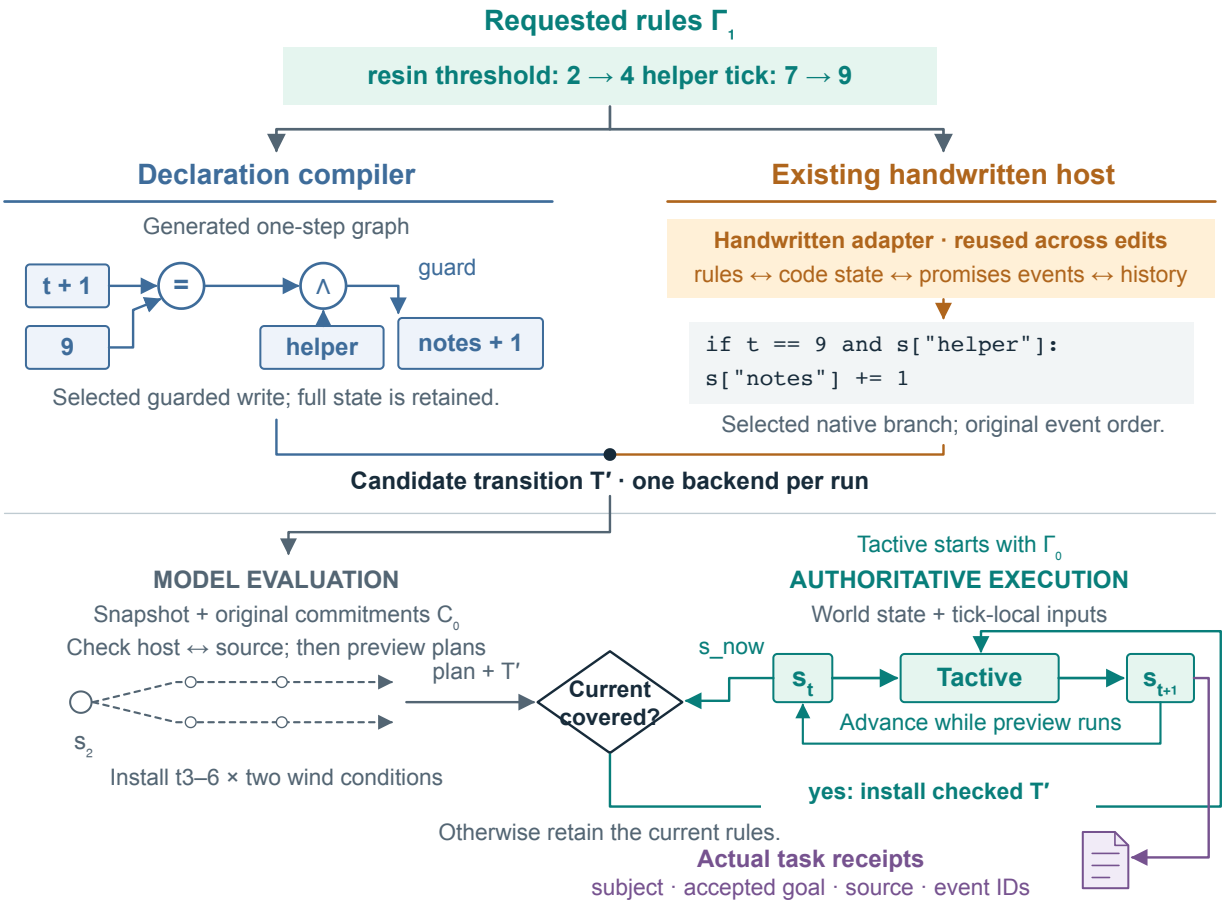

Fixed results	Compiled	Native
Old goals	16 / 16	16 / 16

New activities: 2 / 8 for each method

Same outcomes; initial integration effort unmeasured.